


SWEP AB15T – AHRI Certified®

SWEP A is our AHRI Certified® range of Brazed Plate Heat Exchangers. If you are looking for the additional security of third-party verified performance for your HVAC systems, this is the choice.

The highly efficient AB15T has been developed to have maximum thermal length. Precision optimization allows efficient operation even at extremely small temperature differences, making the product the obvious choice for applications demanding high heat flux and improved energy utilization.



Connections*

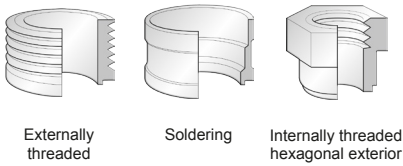

*For specific dimensions, or information about other types of connections, please contact your SWEP sales representative.

Pressure classes

- Y** Intermediate, evaluated per EN 13345.
- S** Standard, evaluated per EN 13345.
- M** Medium, evaluated per EN 13345.

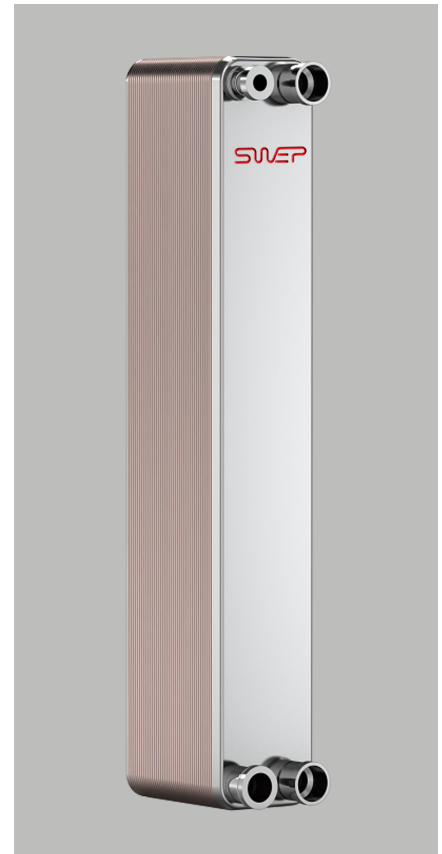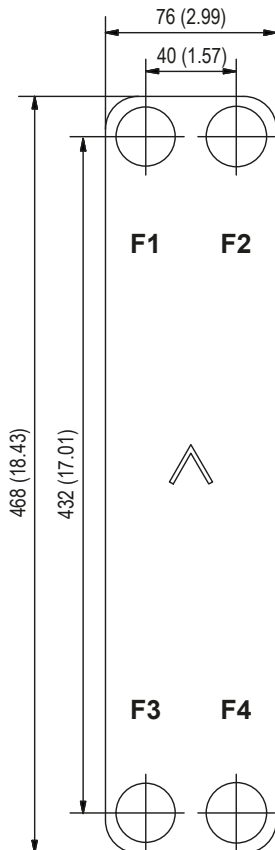

| | |
|----------------------------|-------------------|
| Max number of plates (NoP) | 60 |
| Port size F1/P1 | 16 mm (0.63 in) |
| Port size F2/P2 | 16 mm (0.63 in) |
| Port size F3/P3 | 16 mm (0.63 in) |
| Port size F4/P4 | 16 mm (0.63 in) |
| Max volume flow | 4 m³/h (17.6 gpm) |
| Channel volume (SI) | 0,063 dm³ |
| Channel volume (US) | 0.00222 ft³ |




| Materials | Channel plate | Brazing |
|-----------|-----------------|---------|
| SC | Stainless steel | Copper |
| SN | Stainless steel | Nickel |

| Materials | Channel plate | Brazing |
|-----------|----------------------|---------------------|
| SC M | 4+(2,24×NoP) mm | 1.25+(0,104×NoP) kg |
| | 0.157+(0.088×NoP) in | 2.76+(0.229×NoP) lb |
| SC Y | 2+(2,24×NoP) mm | 0.62+(0,104×NoP) kg |
| | 0.079+(0.088×NoP) in | 1.38+(0.229×NoP) lb |
| SN S | 4+(2,24×NoP) mm | 0,65+(0,104×NoP) kg |
| | 0.157+(0.088×NoP) in | 1.42+(0.229×NoP) lb |

www.swep.net



SWEP AB15T – AHRI Certified®

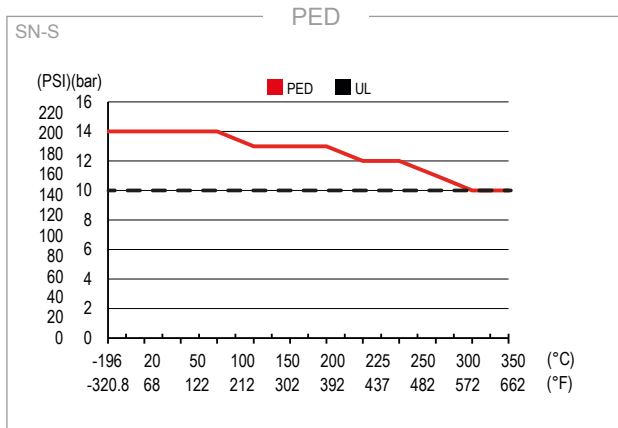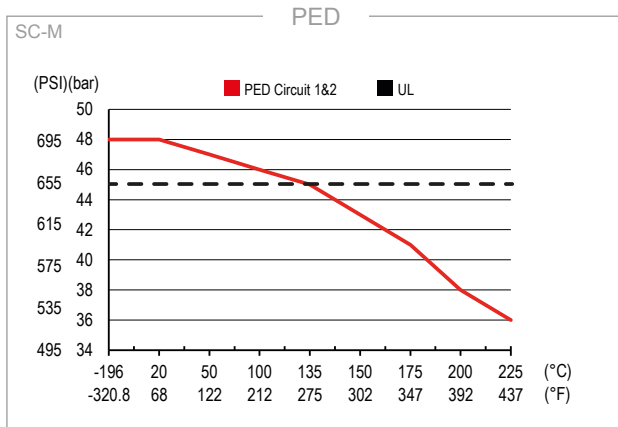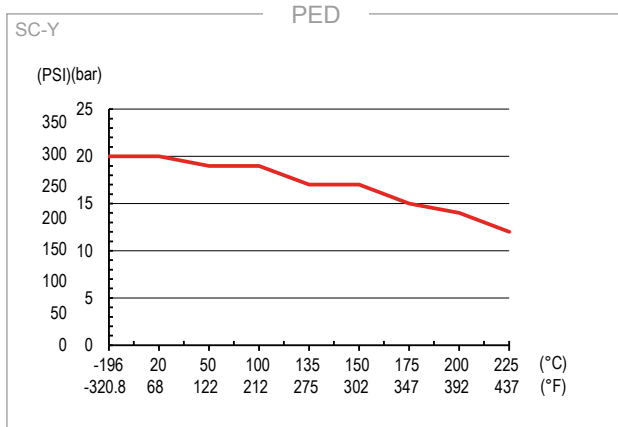

Third party approvals


SWEP BPHEs are generally approved by listed below certification organizations:

- Europe, Pressure Equipment Directive (PED)
- America, Underwriters Laboratories Inc (UL)
- Japan, Kouatsu-Gas Hoan Kyoukai (KHK)

Additionally SWEP holds approvals from a vast variety of other certification organizations. For approval information regarding a specific product please contact your local SWEP representative. SWEP reserves the right to make changes without prior notice.

The BPHE concept

The Brazed Plate Heat Exchanger (BPHE) is constructed as a plate package of corrugated channel plates with a filler material between each plate. During the vacuum brazing process, the filler material forms a brazed joint at every contact point between the plates, creating complex channels. The BPHE allows media at different temperatures to come into close proximity, separated only by channel plates that enable heat from one media to be transferred to the other with very high efficiency. The concept is similar to other plate and frame technology, but without the gaskets and frame parts.

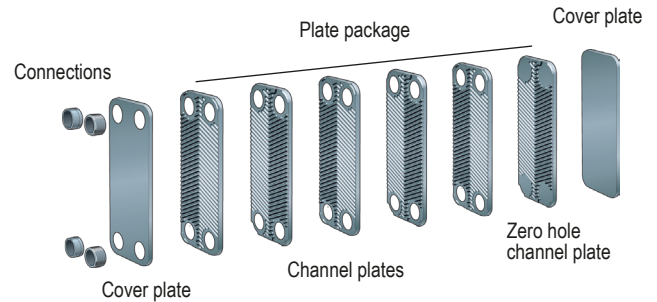

SSP calculation software

With SWEP's unique SSP, the SWEP Software Package, you can do advanced heat transfer calculations yourself, and choose the product solution that suits your application best. It's also easy to choose connections and generate drawings of the complete product. If you would like advice, or you would like to discuss different product solutions, SWEP offers all the service and support your need.

Material disclaimer

The information and recommendations in regards to the products are presented in good faith, however, SWEP makes no representations or warranties as to the completeness or accuracy of the information. Information is supplied upon the condition that the purchasers will make their own determination as to the products' suitability for their purposes prior to use. Purchasers should note that the properties of the products are both application and material selection dependent and that products containing stainless steel are still subject to corrosion if used in unsuitable environments.